DI-WAY AND-5 OTT 4k S905 USB Upgrade Guide

pls download the new firmware as link :
https://mega.nz/#!mZsmTbJB!Y3AKFkISSckvAg
T9SBTUZG4oI9AINugG8ns82ltzE5s
Update Process same as before
1. Please unzip , and copy all files to U disk or SDcard directory (tips: pls make U disk/SD card as FTA32 format)
2. Put U disk/SD card plug to OTG port as picture(OTG Port)
3. please find out "update & backup" apk, will to see the picture (update & backup), to do as the step one by one till update successed.
4. Attention : can't back to the old version once updated new version (20151216), otherwise the box wont be ablet to boot.
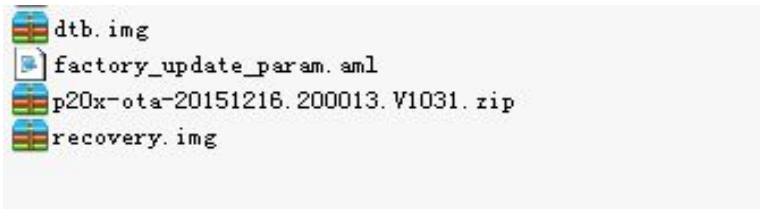
Tento nový firmware stáhnout jako odkaz:
https://mega.nz/#!mZsmTbJB!Y3AKFkISSckvAg
T9SBTUZG4oI9AINugG8ns82ltzE5s
Procesu aktualizace stejné jako dříve
1. Prosím rozbalení a zkopírujte všechny soubory na disk U nebo sdcard adresáře (USB disk / SD kartu ve formátu FTA32)
2. Nasaďte U disk / SD konektor karta OTG portu jako obrázek (OTG Port)
3. Prosím, zjistit, " aktualizovat & backup" APK , budete vidět viz obrazek (aktualizace a zálohy), děla jako krok za krokem po jednom až do aktualizace "successed" .
4. Pozor : Nelze zpět k původní verzi , jakmile aktualizujete novou verzi (20151216) .
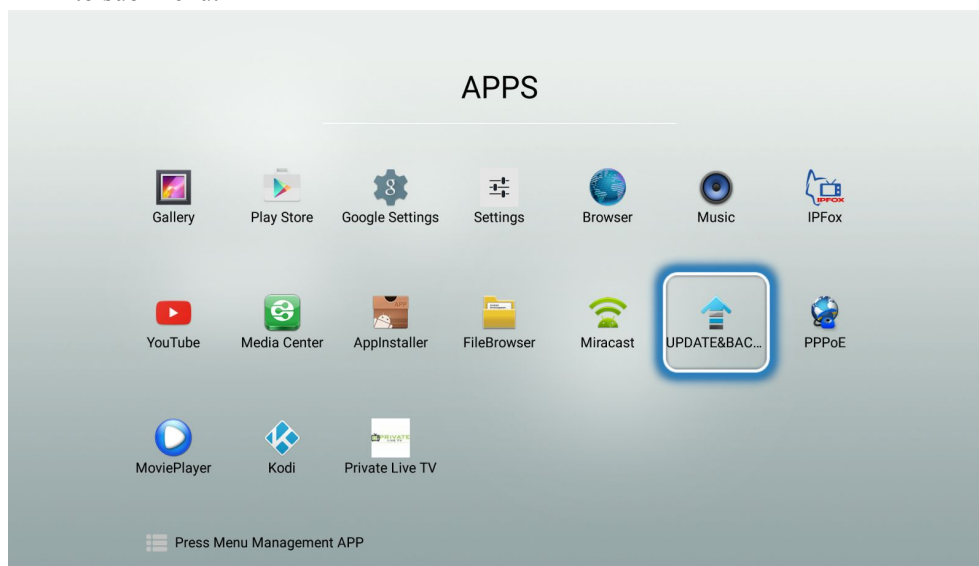
1. Copy the upgrade files to the root of TF card or USB device. (Tips: TF card or USB device file system must be FAT32 format)

```
dtb.img
factory_update_param.aml
p20x-ota-20151216.200013.V1031.zip
recovery.img
```

2. If use USB device to upgrade. Plug it into the OTG host of the box.

3. Switch to APPS List, Find out the "UPDATE&BACKUP" application, and Press OK Key into sub-menu.

4. Move the cursor to "select" button, Press OK key to select the upgrade file.

To be find out the upgrade file and Press OK key to confirm.

5. Select the two checkbox of wipe data and Wipe Media. Move the cursor to " upgrade" button and Press OK key to upgrade
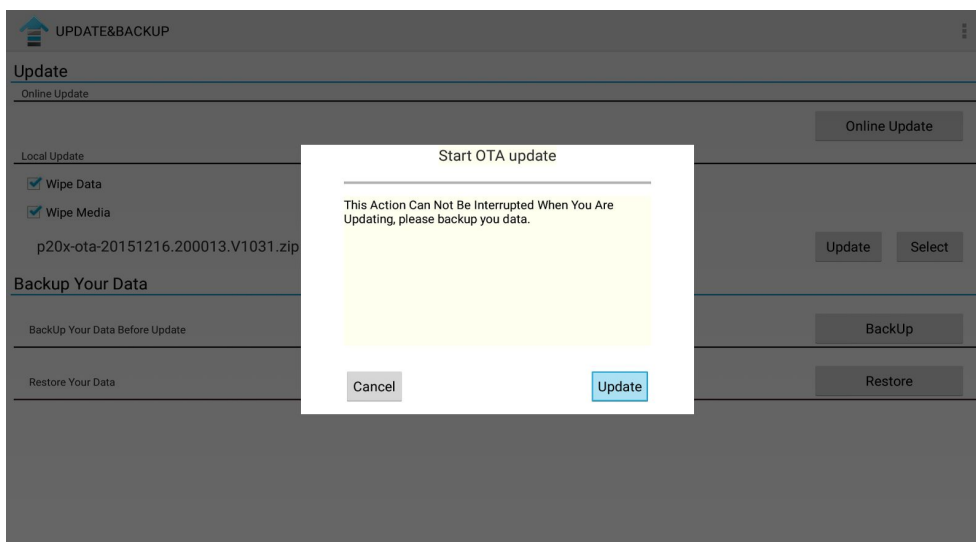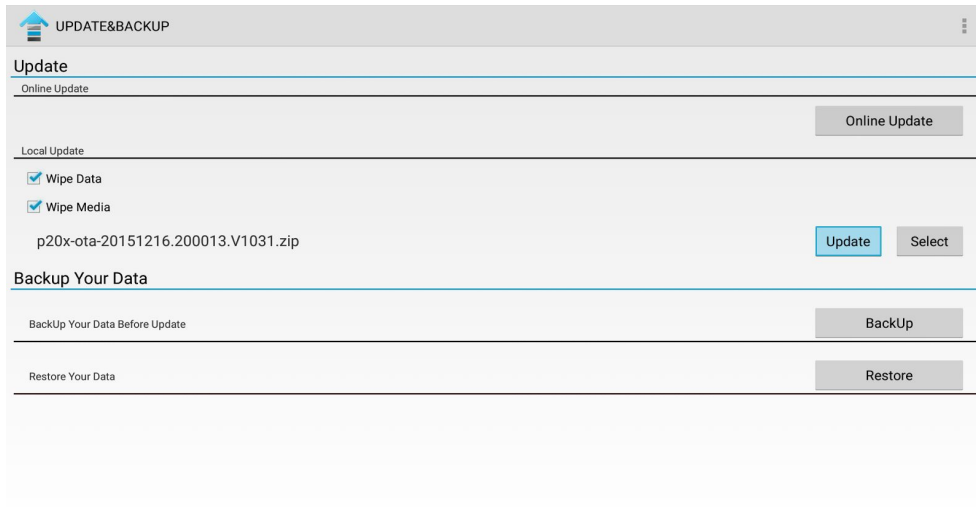
6. The upgrade process will take 3mins approximately. Please don't power off during the upgrading . After upgrade finished, the box will reboot automatically.